

The Cathedral Collection

The Cathedral Collection

Welcome to the Cathedral Collection, a diverse range of charismatic wood floors, beautifully designed and expertly crafted.

Within the Cathedral Collection, you will find a variety of stunning natural Oak floors in 1-strip, 3-strip & now Herringbone formats. The colour spectrum, from pale white oaks, through to natural straw browns, modern greys and dark smokey hues, reflects a range of colours and styles that are highly sought after by the modern consumer.

There is diversity and character within this collection, reflecting the natural beauty of wood. Floors that are built to stand the test of time, feel warm underfoot, and bring a touch of class to soften the interior décor of any home.

Each product resonates with quality and exceptional craftsmanship, combining stunning attention to detail with innovative design.

All products come with a manufacturer's warranty, a mechanical glue-less locking system, and a hardwood surface, which can be sanded and resealed up to three times within the board's lifetime.

Beauty With A Conscience

The Cathedral Collection is designed with the discerning consumer in-mind. These floors will transform a home or business, creating a calm environment that will exude confidence and promote a sense of well-being within the interior space.


All floors are sustainably sourced, have full chain of custody and are manufactured to strict environmental guidelines.

Quality Products, Quality Service

Stocked in bulk in the UK, all of the Cathedral Collection floors can typically be delivered nationwide within 3 working days.

Branded display stands are available to promote the collection in-store along with the product specification sheets included within this binder, giving full details of each product from the surface treatment and board dimensions to the wear-layer and warranty.

Hand samples of all of the floors in the Cathedral Collection can also be delivered to your customers direct or into branch to allow consumers to see the products in the flesh prior to making their purchase.

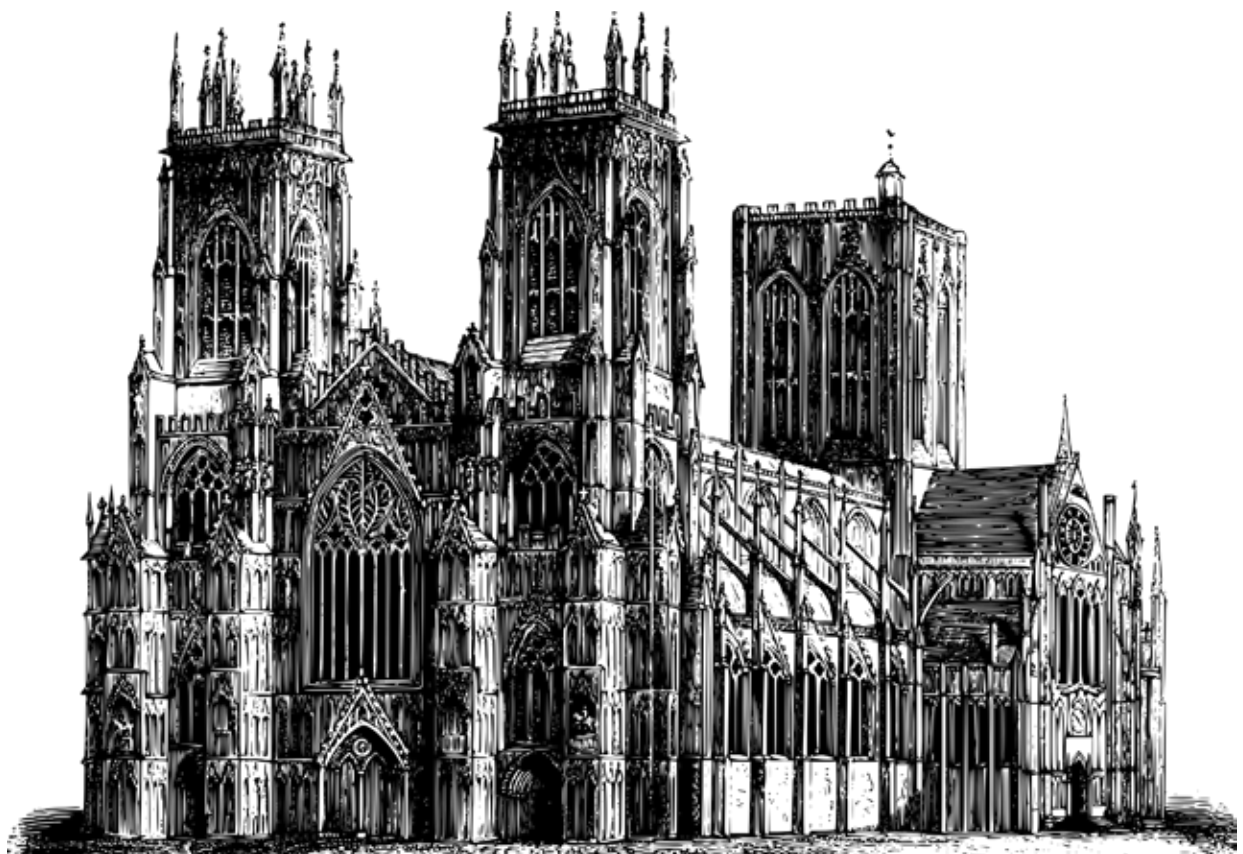

Special Offer - Only While Stocks Last!



Oak Palermo Grey

Technical Specifications:

| | |
|-----------------------------------|-------------------------|
| Available Finishes: | Brushed Matt Lacquer |
| Design: | 1-Strip, 4-Sided Bevel |
| Board Dimensions: | 1900 x 190 x 14mm |
| Wear-Layer: | 3.5mm approx. |
| Re-Sandable: | 2 – 3 Times. |
| Joint System: | Woodloc® 5G Click Joint |
| Installation: | Floating or Glue-Down |
| Pack Size: | 2.88m ² |
| Package Weight: | 23kgs |
| Warranty: | 20 Years. |
| Suitable with Underfloor Heating? | Yes |



Special Offer - Only While Stocks Last!



Oak Durham Matt

Technical Specifications:

| | |
|-----------------------------------|-------------------------|
| Available Finishes: | Matt Lacquered |
| Design: | 3-Strip |
| Board Dimensions: | 2421 x 200 x 14mm |
| Wear-Layer: | 3mm Approx. |
| Re-Sandable: | 2 - 3 Times. |
| Joint System: | Profiloc 5G Click-Joint |
| Installation: | Floating or Glue-Down |
| Pack Size: | 2.91m ² |
| Package Weight: | 22kgs |
| Warranty: | 20 Years. |
| Suitable with Underfloor Heating? | Yes |





Oak Milan Matt

Technical Specifications:

| | |
|--------------------|--|
| Surface Finish: | Brushed Matt Lacquered |
| Format: | 1-Strip, 4-Sided Micro-Bevel |
| Board Dimensions: | 2200 x 185 x 13mm |
| Wear-Layer: | 2.5mm approx. |
| Re-Sandable: | 1 - 2 Times. |
| Joint System: | Automatic-Click-System (Long & Edge Locking) |
| Installation: | Floating or Glue-Down |
| Pack Size: | 3.663m ² |
| Package Weight: | 26kgs |
| Warranty: | 25 Years. |
| Thermal Resistance | 0.087 m ² K/W Suitable for Underfloor Heating |





Oak Milan Oiled

Technical Specifications:

| | |
|--------------------|--|
| Surface Finish: | Brushed & Oiled |
| Format: | 1-Strip, 4-Sided Micro-Bevel |
| Board Dimensions: | 2200 x 185 x 13mm |
| Wear-Layer: | 2.5mm approx. |
| Re-Sandable: | 1 - 2 Times. |
| Joint System: | Automatic-Click-System (Long & Edge Locking) |
| Installation: | Floating or Glue-Down |
| Pack Size: | 3.663m ² |
| Package Weight: | 26kgs |
| Warranty: | 25 Years. |
| Thermal Resistance | 0.087 m ² K/W Suitable for Underfloor Heating |





Oak Sofia Satin

Technical Specifications:

| | |
|---------------------|---|
| Available Finishes: | Satin Lacquered |
| Design: | 3-Strip |
| Board Dimensions: | 2200 x 185 x 13mm |
| Wear-Layer: | 3.6mm Approx. |
| Re-Sandable: | 1 – 2 times |
| Joint System: | Automatic-Click-System (Long & Edge Locking) |
| Installation: | Floating or Glue-Down |
| Pack Size: | 3.663m ² |
| Package Weight: | 29kgs |
| Warranty: | 25 Years. |
| Thermal Resistance | 0.087m ² K/W Suitable for Underfloor Heating |





Oak Sofia Matt

Technical Specifications:

| | |
|---------------------|---|
| Available Finishes: | Matt Lacquered |
| Format: | 3-Strip |
| Board Dimensions: | 2200 x 185 x 13mm |
| Wear-Layer: | 2.5mm Approx. |
| Re-Sandable: | 1 – 2 times |
| Joint System: | Automatic-Click-System (Long & Edge Locking) |
| Installation: | Floating or Glue-Down |
| Pack Size: | 3.663m ² |
| Package Weight: | 29kgs |
| Warranty: | 25 Years. |
| Thermal Resistance | 0.087m ² K/W Suitable for Underfloor Heating |






Oak Florence White Matt

Technical Specifications:

| | |
|-----------------------------------|-------------------------|
| Available Finishes: | Matt Lacquered |
| Design: | 1-Strip, 4-Sided Bevel |
| Board Dimensions: | 1900 x 190 x 14mm |
| Wear-Layer: | 3.5mm approx. |
| Re-Sandable: | 2 – 3 times |
| Joint System: | Woodloc® 5G Click Joint |
| Installation: | Floating or Glue-Down |
| Pack Size: | 2.88m ² |
| Package Weight: | 23kgs |
| Warranty: | 20 Years. |
| Suitable with Underfloor Heating? | Yes |

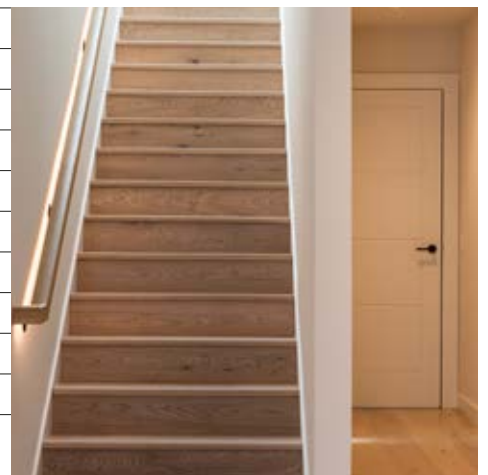



Oak Seville Oiled

Technical Specifications:

| | |
|-----------------------------------|------------------------|
| Available Finishes: | Brushed White Oiled |
| Design: | 1-Strip, 4-Sided Bevel |
| Board Dimensions: | 1900 x 190 x 14mm |
| Wear-Layer: | 3mm Approx. |
| Re-Sandable: | 2 – 3 Times. |
| Joint System: | Fold-Down Click Joint |
| Installation: | Floating or Glue-Down |
| Pack Size: | 2.88m ² |
| Package Weight: | 23kgs |
| Warranty: | 20 Years. |
| Suitable with Underfloor Heating? | Yes |





Oak Galicia Brushed Matt

Technical Specifications:

| | |
|---------------------|--|
| Available Finishes: | Brushed Matt Lacquered |
| Design: | 1-Strip, 4-Sided Micro-Bevel |
| Board Dimensions: | 2200 x 185 x 13mm |
| Wear-Layer: | 2.5mm Approx. |
| Re-Sandable: | 1 - 2 Times. |
| Joint System: | Automatic-Click-System (Long & Edge Locking) |
| Installation: | Floating or Glue-Down |
| Pack Size: | 3.663m ² |
| Package Weight: | 26kgs |
| Warranty: | 25 Years. |
| Thermal Resistance | 0.087 m ² K/W Suitable for Underfloor Heating |





Oak Galicia Oiled

Technical Specifications:

| | |
|---------------------|--|
| Available Finishes: | Brushed & Oiled |
| Design: | 1-Strip, 4-Sided Micro-Bevel |
| Board Dimensions: | 2200 x 185 x 13mm |
| Wear-Layer: | 2.5mm Approx. |
| Re-Sandable: | 1 - 2 Times. |
| Joint System: | Automatic-Click-System (Long & Edge Locking) |
| Installation: | Floating or Glue-Down |
| Pack Size: | 3.663m ² |
| Package Weight: | 23kgs |
| Warranty: | 25 Years. |
| Thermal Resistance | 0.087 m ² K/W Suitable for Underfloor Heating |





Oak Trondheim Oiled

Technical Specifications:

| | |
|-----------------------------------|-------------------------|
| Available Finishes: | Brushed and Oiled |
| Design: | 1-Strip, 4-Sided Bevel. |
| Board Dimensions: | 2420 x 187 x 15mm |
| Wear-Layer: | 3mm approx. |
| Re-Sandable: | 2 - 3 Times. |
| Joint System: | Woodloc® 5S Click Joint |
| Installation: | Floating or Glue-Down |
| Pack Size: | 2.72m ² |
| Package Weight: | 23kgs |
| Warranty: | 30 Years. |
| Suitable with Underfloor Heating? | Yes |





Oak Carlisle Natural Herringbone

Technical Specifications:

| | |
|---------------------|---|
| Available Finishes: | Matt Lacquered |
| Design: | Herringbone, 4-Sided Micro-Bevel |
| Board Dimensions: | 570 x 95 x 10.5mm |
| Wear-Layer: | 2.5mm |
| Joint System: | Allround-Click-System |
| Installation: | Floating |
| Pack Size: | 1.08m ² |
| Package Weight: | 5.40kgs |
| Warranty: | 25 Year Residential Warranty |
| Thermal Resistance | 0.07m ² K/W - Suitable with Underfloor Heating |





Oak Clifton White Herringbone

Technical Specifications:

| | |
|---------------------|---|
| Available Finishes: | Matt Lacquered |
| Design: | Herringbone, 4-Sided Micro-Bevel |
| Board Dimensions: | 570 x 95 x 10.5mm |
| Wear-Layer: | 2.5mm |
| Joint System: | Allround-Click-System |
| Installation: | Floating |
| Pack Size: | 1.08m ² |
| Package Weight: | 5.40kgs |
| Warranty: | 25 Year Residential Warranty |
| Thermal Resistance | 0.07m ² K/W - Suitable with Underfloor Heating |





Oak York Grey / Brown Herringbone

Technical Specifications:

| | |
|---------------------|---|
| Available Finishes: | Matt Lacquered |
| Design: | Herringbone, 4-Sided Micro-Bevel |
| Board Dimensions: | 570 x 95 x 10.5mm |
| Wear-Layer: | 2.5mm |
| Joint System: | Allround-Click-System |
| Installation: | Floating |
| Pack Size: | 1.08m ² |
| Package Weight: | 5.40kgs |
| Warranty: | 25 Year Residential Warranty |
| Thermal Resistance | 0.07m ² K/W - Suitable with Underfloor Heating |






Oak Inverness Matt

Technical Specifications:

| | |
|-----------------------------------|------------------------|
| Available Finishes: | Brushed Matt Lacquered |
| Design: | 3-Strip |
| Board Dimensions: | 2423 x 200 x 15mm |
| Wear-Layer: | 3mm approx. |
| Re-Sandable: | 2 – 3 Times. |
| Joint System: | Woodloc® 5SClick Joint |
| Installation: | Floating or Glue-Down |
| Pack Size: | 2.91m ² |
| Package Weight: | 23kgs |
| Warranty: | 30 Years. |
| Suitable with Underfloor Heating? | Yes |



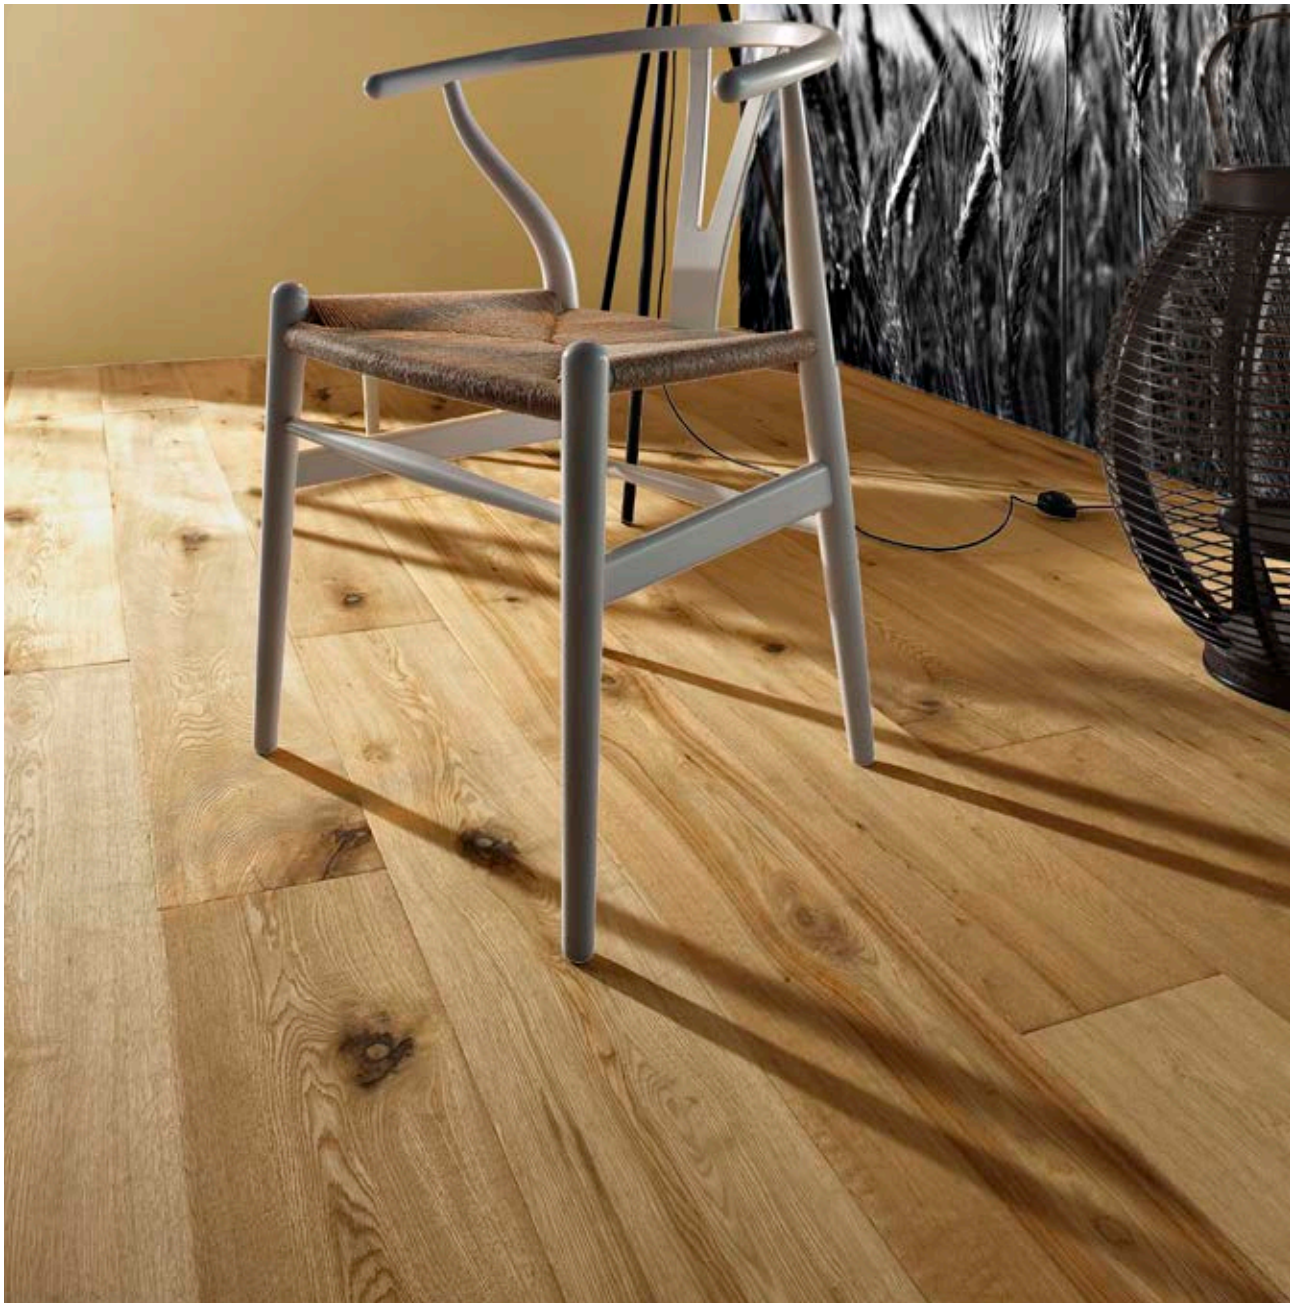


Oak Canterbury Oiled

Technical Specifications:

| | |
|-----------------------------------|-------------------------|
| Available Finishes: | Oiled, Handscraped |
| Design: | 1-Strip, 4-Sided Bevel |
| Board Dimensions: | 1900 x 190 x 14mm |
| Wear-Layer: | 3mm approx. |
| Re-Sandable: | 2 – 3 Times. |
| Joint System: | Woodloc® 5G Click Joint |
| Installation: | Floating or Glue-Down |
| Pack Size: | 2.88m ² |
| Package Weight: | 23kgs |
| Warranty: | 20 Years. |
| Suitable with Underfloor Heating? | Yes |



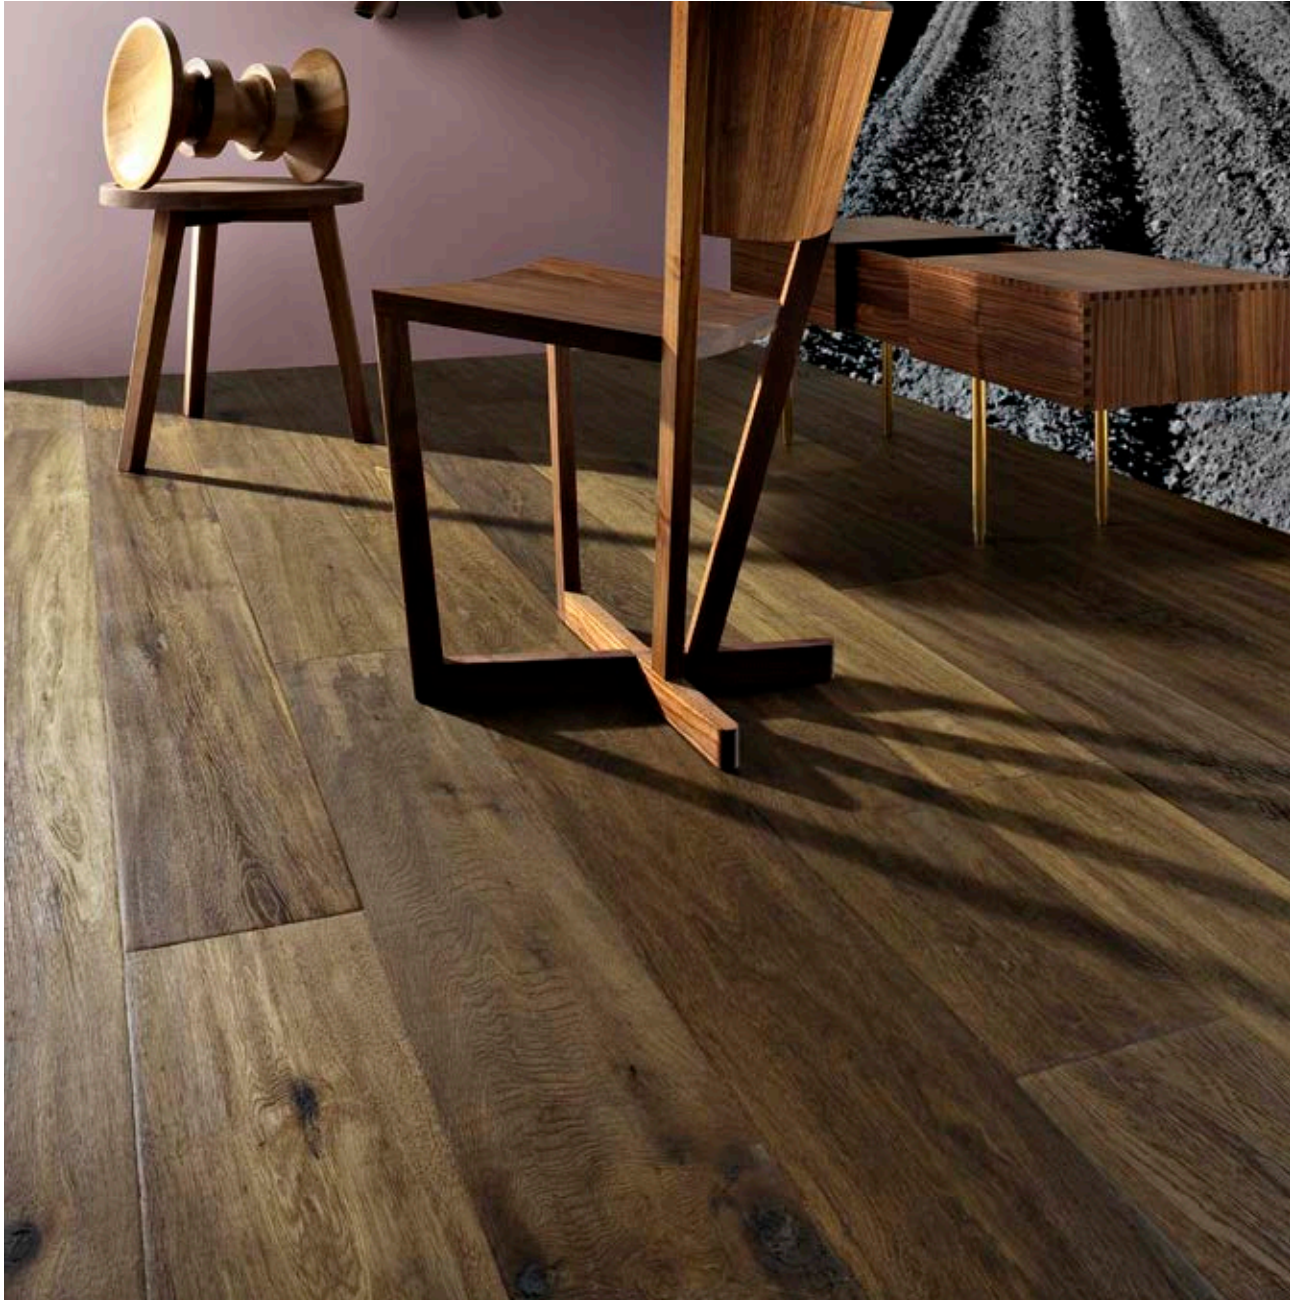

Oak Salisbury Oiled

Technical Specifications:

| | |
|-----------------------------------|-----------------------------|
| Available Finishes: | Oiled, Smoked & Handscraped |
| Design: | 1-Strip, 4-Sided Bevel |
| Board Dimensions: | 1900 x 190 x 14mm |
| Wear-Layer: | 3mm approx. |
| Re-Sandable: | 2 – 3 Times. |
| Joint System: | Woodloc® 5G Click Joint |
| Installation: | Floating or Glue-Down |
| Pack Size: | 2.88m ² |
| Package Weight: | 23kgs |
| Warranty: | 20 Years. |
| Suitable with Underfloor Heating? | Yes |





Oak Cologne Oiled

Technical Specifications:

| | |
|-----------------------------------|--------------------------------------|
| Available Finishes: | Brushed Oiled |
| Design: | 1-Strip, 4-Sided MicroBevel, Smoked. |
| Board Dimensions: | 1900 x 190 x 14mm |
| Wear-Layer: | 2.5mm approx. |
| Re-Sandable: | 2 – 3 Times. |
| Joint System: | Fold-Down Joint |
| Installation: | Floating or Glue-Down |
| Pack Size: | 2.88m ² |
| Package Weight: | 22kgs |
| Warranty: | 20 Years. |
| Suitable with Underfloor Heating? | Yes |





Oak Venice Oiled

Technical Specifications:

| | |
|-----------------------------------|-------------------------------|
| Available Finishes: | Grey Stained & Oiled |
| Design: | 1-Strip, 4-Sided Micro-Bevel. |
| Board Dimensions: | 1900 x 190 x 14mm |
| Wear-Layer: | 3mm approx. |
| Re-Sandable: | 2 – 3 Times. |
| Joint System: | Fold Down Joint |
| Installation: | Floating or Glue-Down |
| Pack Size: | 2.88m ² |
| Package Weight: | 23kgs |
| Warranty: | 20 Years. |
| Suitable with Underfloor Heating? | Yes |

